




## AEGIS SYSTEM

### MO9605 - TEMPERATURE MONITOR MODULE

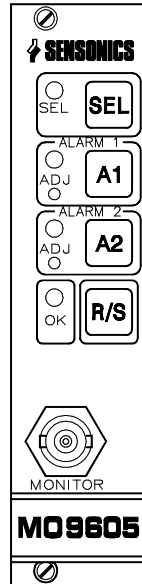

- ACCEPTS INPUTS FROM RTD'S.
- SINGLE CHANNEL.
- ANALOGUE OUTPUTS.
- FIELD SELECTABLE TEMPERATURE RANGE (CELSIUS OR FAHRENHEIT).
- ADJUSTABLE ALARMS (ALERT AND TRIP).
- INDIVIDUAL POWER SUPPLY (AC OR DC INPUT).
- UP TO 14 MODULES PER 19 INCH RACK. (OR 12 WITH A COMMON DISPLAY)

The low cost MO9605 Temperature Monitor Module is designed to accept a specified Nickel or Platinum Resistance Temperature Detector input and transducer excitation output. It is ideally suited to applications where constant surveillance is required to protect machinery against sudden deterioration in condition and avoid costly breakdowns.

Current and Voltage signal outputs are factory set as required for the specified temperature range. Adjustable level, latching or fleeting alarms may operate with either normally open or normally closed contact outputs. All these signal outputs are continuously available via the rack rear panel terminal blocks.

The module uses only the highest quality components and has been extensively type tested to ensure effective monitoring and prevent spurious alarms.

Up to 12 modules can fit into a standard 19" rack (3U high) with a single shared LED digital display module. Further modules in second and third racks can utilise the same display module by simple connection of the racks. The level of any particular channel is brought up on the display by depressing the 'select' button on the front of each module. An Amber LED illuminates next to the button to indicate which module is currently being displayed. Alarm levels are displayed by pressing and holding the A1 or A2 buttons on the selected module.

The signals available for routing to the monitor are:- a temperature signal in degrees C or F together with alarms 1 and 2 setpoints.

## MO9605 – TEMPERATURE MONITOR MODULE

Each module has its own PSU for increased system integrity, a front panel BNC enables a calibration check facility.

Three off volt free change over relays are provided for each module, A1 and A2 level alarms, and A3 Transducer/PSU integrity. The status of A1 and A2 is displayed on the front panel by red LED's illuminating when the alarms are initiated. The A3 alarm is annunciated by a normally lit green LED in the front panel, when required the Transducer/PSU integrity alarm is able to inhibit A1 and A2 relays when in the Alarm state. A time delay of up to 5 seconds can be applied to alarms and is strongly recommended when the units are used for trip purposes.

### TECHNICAL SPECIFICATION

Input Factory set for Platinum or Nickel resistance detector, two or three wire system.

Temperature Range 0-100°C, 0-150°C, 0-250°C, 0-500°C (others available).

Outputs 1x Current (4-20mA) to the related temp range, others available.  
1x Voltage (0-1V, 0-10V, 1-5V)  
Available on detachable block connectors at rear of the rack.  
Also 10mV/°C Signal provided on front panel BNC.

Alarms A1 Field adjustable level alarms (positive or negative going).  
A2 Field adjustable level alarms (positive or negative going).  
A1 & A2 Field adjustable to be;  
Normally Open or Closed  
Latching or Non-latching  
Normally Energised or De-energised.  
A3 PSU integrity alarm.

All alarms have front panel LED annunciation, are rated to 0.5A @ 110VAC and can have delays of up to 5 seconds.

DS1114



**Sensonics Ltd**  
Northbridge Road  
Berkhamsted  
Herts, HP4 1EF  
United Kingdom  
Tel: +44 (0)1442 876833  
Fax: +44 (0)1442 876477  
[www.sensonics.co.uk](http://www.sensonics.co.uk)