



### Applications

- Machine Shaft Position
- Turbine Differential Expansion
- Low profile mounting
- Harsh Environments

### Features

- Switch selectable system cable lengths 5m, 7m and 9m.
- LED indication of selected length.
- 3.5mm socket for gap voltage monitoring.
- Double screened cable for high noise immunity.
- Snap lock and shake proof cable connection.
- Low profile driver for easy local integration to machine (Din rail mount opt).
- Excellent repeatability on replacement of probe, extension or driver.

The XPR12 proximity probe system consists of a calibrated probe, extension cable and driver. Utilising the eddy current principle, this combination forms a tuned circuit with the target material and variations in probe face to target distance are detected in this circuit by the driver. This provides a linearised voltage output proportional to target gap with a nominal sensitivity of 1.38 mV/um and a range of up to 12.0 mm. This type of measurement system provides highly accurate (resolution typically to a few micro-meters) relative positional measurements, for harsh environments up to 180 °C.

The driver unit offers selectable system lengths of 5 m, 7 m or 9 m, with a front panel green LED indicating the selected option. The gap voltage monitoring socket assists with commissioning the probe system; a volt meter can be connected directly to the driver through the 3.5 mm standard audio socket to display the gap voltage at the point of installation and the probe mechanical gap can then be adjusted to suite the application.

The cable system incorporates snap lock connectors which require no torqueing and provide a shake proof solution important for heavy industrial applications. The double screened cable offers robustness in combination with high immunity to interference and optional stainless steel convoluted armour is available for applications or environments where cable protection is paramount.



**System Performance**


Measurement Range:	12.0 mm
Linear Range:	0.63 mm (25 mil) to 12.7 mm (500 mil) from electrical null position.
Electrical null position:	Approximately 0.50 mm from target (Driver at 0 V).
Linearity: (% of FS)	± 1%, -1.75 V to -17.5 V ± 2%, -1.0V to -17.5 V ± 2%, 0 °C to +150 °C @ -10.0V
Std Sensitivity:	1.38 V/mm (35 mV/mil) ± 1 %
Resolution:	<0.003 mm
Interchangability:	Maximum interchangability error replacing either probe, extension cable or driver in calibrated system is ± 5 %.
Available system lengths:	5 m, 7 m and 9 m
Cable length tolerance	
Probe (1 metre):	1.0 m to 1.5 m
Cable Extension (4 metre):	4.0 m to 4.4 m
Cable Extension (6 metre):	6.0 m to 6.6 m
Cable Extension (8 metre):	8.0 m to 8.8 m
Frequency Response:	DC to 5 kHz
Maximum Cable Length:	330 m based on 120 pF/m at <10 kHz and 500 um pk-pk. 3000 m based on 120 pF/m at <1 kHz and 500 um pk-pk.
Reference Target Material:	ANSI 4140

**Probe**


Probe tip diameter:	25.0 mm
Probe tip material:	PPS 40 % Glass Filled
Probe body material:	303 stainless steel
Probe body format:	Straight Type
Cable type:	Triaxial 75 Ohm Coaxial FEP outer jacket 3.2 mm outer diameter
Armoured option:	Convuluted Stainless Steel 6.4 mm outer diameter
Probe Resistance:	1.1 Ohms ± 0.2 Ohm With 1.0 m cable
Operating Temp Range:	-30 °C to +180 °C
Storage Temp Range:	-40 °C to +180 °C
Minimum target size:	2 x probe tip diameter
Magnetic field effect:	<1 % at 110 mT
Connector	Female Miniature Coaxial

**Driver**

Linear voltage range: Standard Option	-1.0 V to -17.5 V for 0.63 mm (25 mil) to 12.7 mm (500 mil)
System length selection:	Internal switch 5 m, 7 m or 9 m
System length indication:	Green LED lamp
Power supply range:	-16.0 Vdc to -28.0 Vdc Note: Output voltage is limited to 1.2 V below supply voltage when supply is < -21.5 V.
Power supply: sensitivity	< 0.3 mVout / Vsupply
Power consumption:	3 mA typ, 7 mA max
Output impedance:	75 Ohms
Monitor Output Impedance:	10 KOhm
Sensor Connector type:	Self Locking Miniature Male Coaxial
Monitor Connector type:	3.5 mm audio jack
Mounting:	Din Rail or Plate
Mass:	250 grams
Operating Temp Range:	-30 °C to +90 °C
Storage Temp Range:	-40 °C to +90 °C

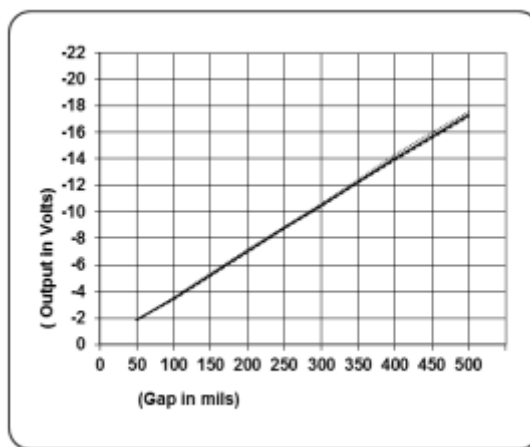

Typical 5m system performance  
 ————— 25 °C  
 ..... 150 °C  
 - - - - - 0 °C

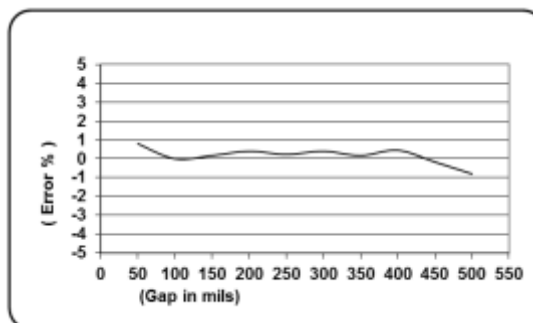

Typical 5m system performance

**Probe Ordering Information**

XPR12 -

**1.0** **U** **1** **0** **0** **00** **06**

**Cable length**

- 1.0 – 1 m
- 5.0 – 5 m
- 7.0 – 7 m
- 9.0 – 9 m

**Cable protection**

- U – Unarmoured double screened (standard)
- C – Conduit (convoluted stainless steel)
- S – Heatshrink isolation over conduit
- G – M20 cable gland fitted to standard cable

**Thread type**

- 0 – M30 x 2.0
- 1 – 1¼-12

**Range (sensitivity)**

- 0 – 0.63 - 12.7mm (0 - 500thou) (1.38mV/mm)

**Hazardous Area Approvals**

- 0 – None
- 1 – ATEX/ IECEx

**Unthreaded Length**

Can be ordered in metric or inches.  
See Note 1.

**Overall Case length**

Can be ordered in metric or inches.  
See Note 2.

**Note 1 - Unthreaded Length Option**

**Imperial Case**

Unthreaded length must be at least 0.8 inches less than the case length. Order in increments of 0.1 in.

Maximum unthreaded length: 7.2 in.

Minimum unthreaded length: 0.0 in.

Example: 04 = 0.4 in.

**Metric Case**

Unthreaded length must be at least 20 mm less than the case length. Order in increments of 10 mm.

Maximum unthreaded length: 180 mm.

Minimum unthreaded length: 0 mm.

Example: 06 = 60 mm.

**Note 2 - Overall Case Length Option**

**Imperial Case**

Order in increments of 0.1 in.

Maximum case length: 8.0 in

Minimum case length: 2.0 in

Example: 24 = 2.4 in

**Metric Case**

Order in increments of 10 mm.

Maximum length: 200 mm.

Minimum length: 50 mm.

Example: 06 = 60 mm.

**Driver Ordering Information**

XED12 -

**U** **0** **0**

**System length**

U – Universal Driver for 5m, 7m and 9m systems (standard)  
S – Special requirements (2m, 14m, etc)

**Range (sensitivity)**

0 = 0.63 - 12.7mm (0 - 500thou) (1.38mV/mm)

**Intrinsic Safety**

0 – None  
1 – ATEX Ex II 1 G EEx ia IIC T4 (Tamb = -40°C to +80°C)

**Extension Cable Ordering Information**

XEC -

**4.0** **U** **0**

**Cable length**

4.0 – 4m  
6.0 – 6m  
8.0 – 8m



**Cable protection**

U – Unarmoured double screened (standard)  
C – Conduit (convoluted stainless steel)  
S – Heatshrink isolation over conduit  
G – M20 cable gland fitted to standard cable


**Intrinsic Safety**

0 – None  
1 – ATEX Ex II 1 G EEx ia IIC T4 (Tamb = -40°C to +180°C)

**Driver Mechanical Configuration**

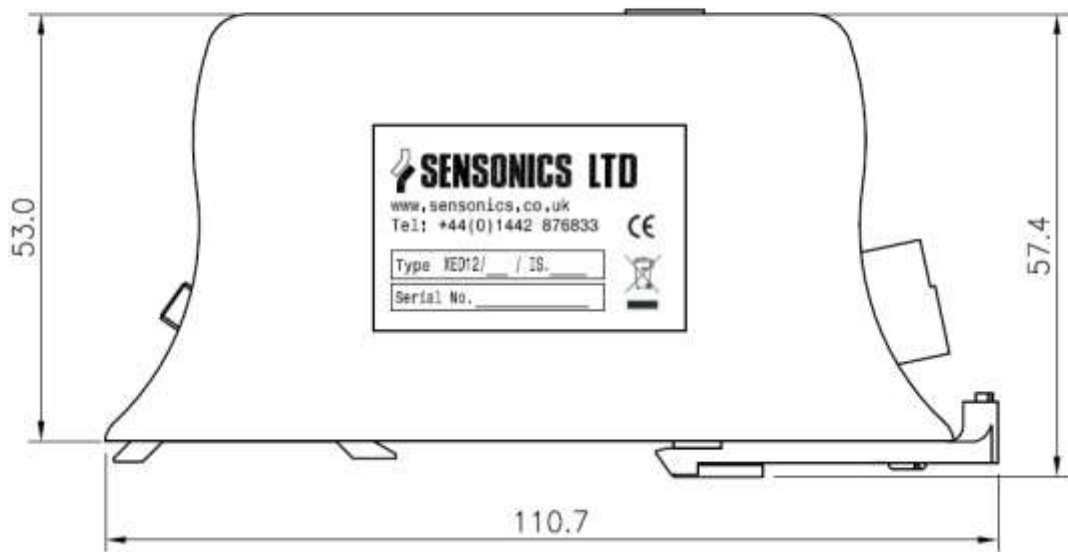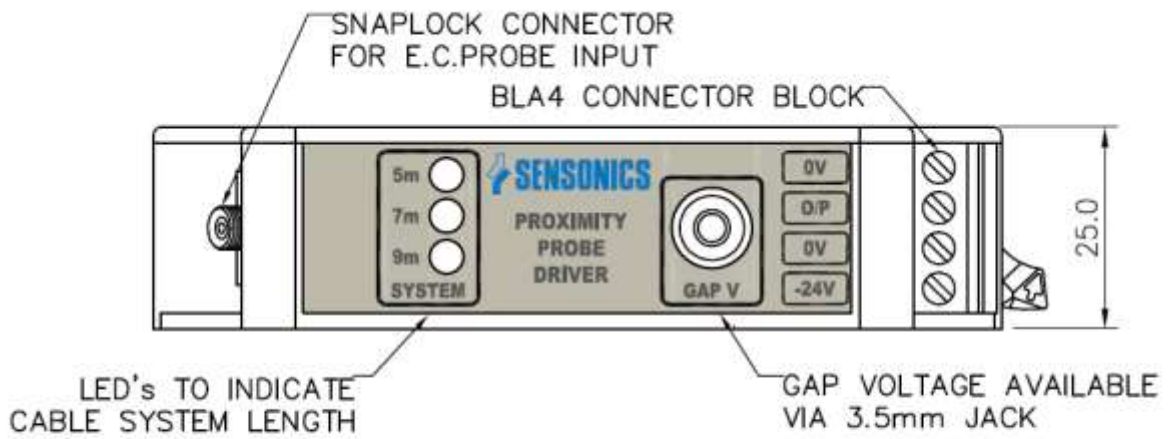

**MOUNTING OPTIONS**

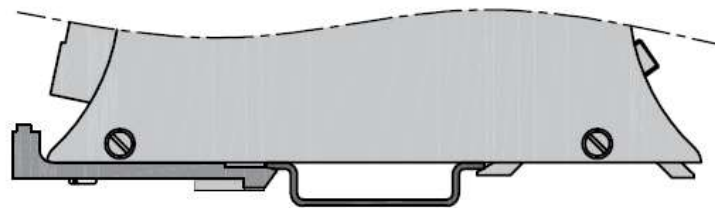


TS35 RAIL

129.2


119.2

SUITABLE FOR 2x M4 SCREW

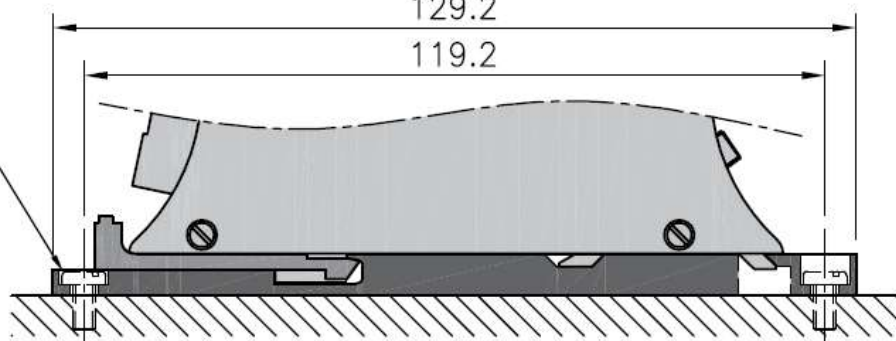


PANEL MOUNT (USING SUPPLIED CLIP)

**Probe Mechanical Configuration**

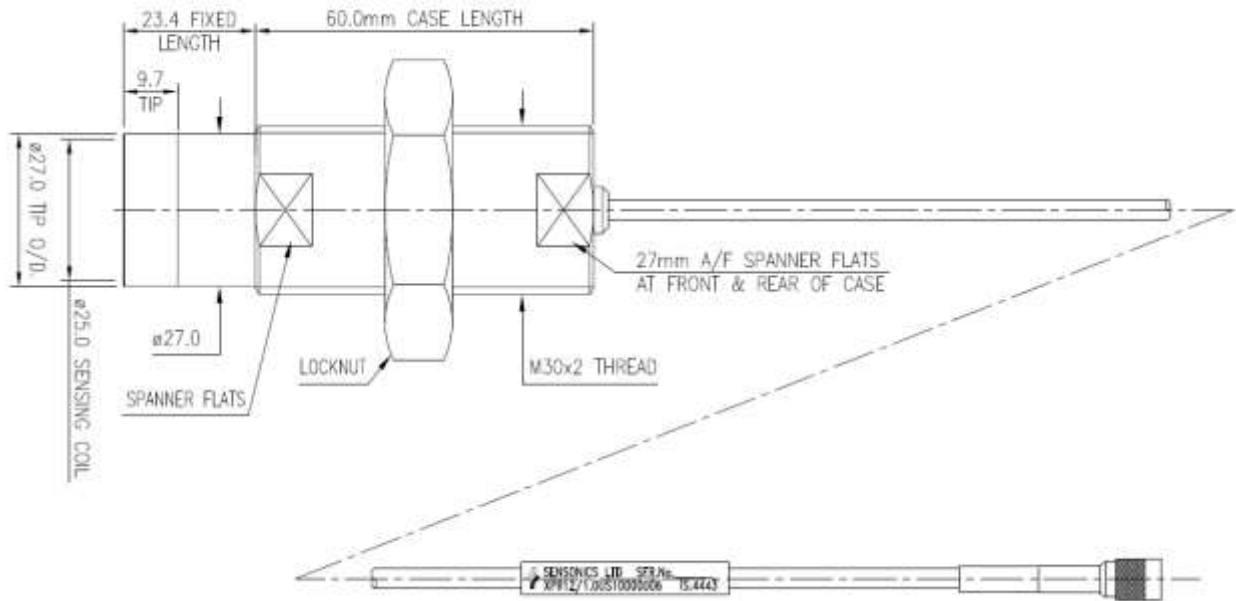

**Extension Cable Mechanical Drawing**

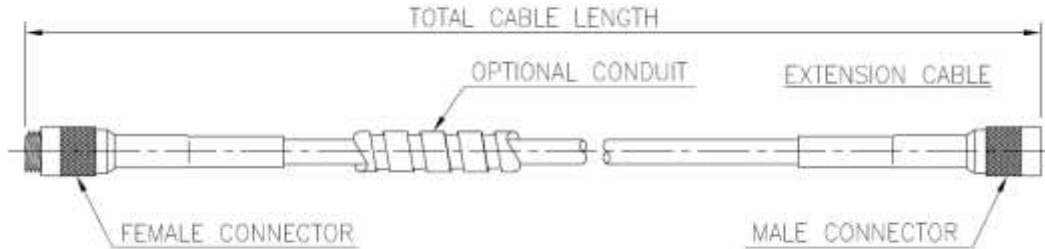

**Sensonics Ltd**  
 Northbridge Road  
 Berkhamsted  
 Herts, HP4 1EF  
 United Kingdom  
 Tel: +44 (0)1442 876833  
 Fax: +44 (0)1442 876477  
[www.sensonics.co.uk](http://www.sensonics.co.uk)