




PZCS ACCELEROMETER

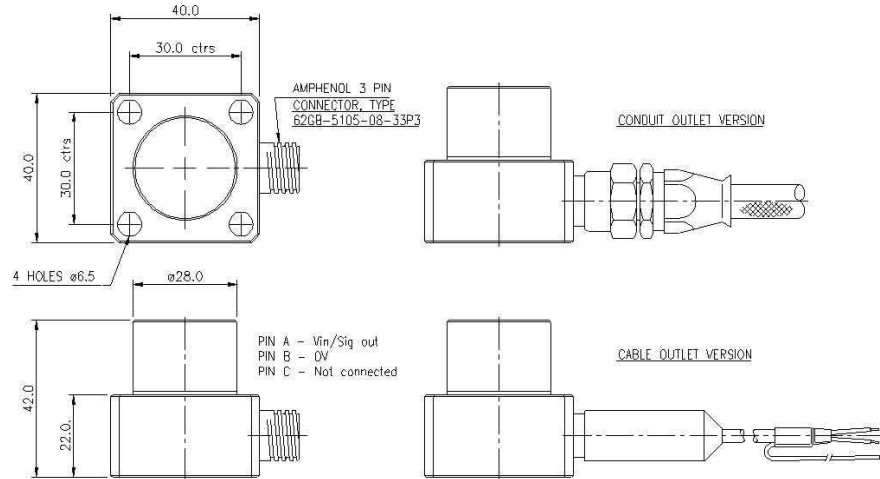

- TWO WIRE, CURRENT DRIVEN
- 50 μ A/g OUTPUT
- INTERNAL CHARGE AMPLIFIER
- HERMITICALLY SEALED
- RADIATION RESISTANT OPTION
- FREQUENCY RANGE 2.5Hz to 9KHz
- MOD APPROVED

The PZCS accelerometer has been designed to meet the rigorous specification and quality requirements for military and naval applications.

It is also ideal for industrial applications requiring a robust yet reasonably small and lightweight transducer with integral electronics.

The accelerometer works on a two wire current loop system, permitting very long interconnecting cables to be used.

The piezo electric sensor, together with the charge amplifier, is contained within a robust, fully sealed stainless steel case having a solid square base with four mounting holes on 30.0 mm centres.

The PZCS is also suitable for nuclear environments requiring resistance to radiation.

PZCS ACCELEROMETER

SPECIFICATION

Operating voltage	11 to 28 volts D.C.
Operating current	3.8mA (5.0mA max)
Output signal	50 uA/g
Dynamic range	Up to 40g
Frequency range	2.5Hz to 9KHz (3dB points)
Mounted resonant frequency	15KHz
Transverse sensitivity	Less than 2.5%
Amplitude linearity	+/- 1% or better
Temperature sensitivity	Less than 5% up to 120°C
	1% per 25°C over range -30°C to +90°C
Residual electrical noise	Less than 0.1mg (10Hz to 9KHz)
Signal transmission	Two wire system

Environmental

Acceleration limit :	Vibration	200g pk at 120Hz for 10 mins
	Shock	500g half sine without connector
Temperature :	Operational	-27°C to +90°C (Intrinsic version -27°C to +75°C)
	Survival	-55°C to +120°C
Humidity	Total water resistance to a depth of 15 metres (Conduit outlet version)	
Pressure	+5 bar	
Magnetic sensitivity	no measurable output at 0.5mT at 50Hz	
Radiation effects	10 ⁸ Rads Gamma, 7.5 x 10 ¹² n/cm/sec – Neutron flux	
Hazardous area	Baseefa certified: EEx ia IIB T5 (Tamb = 75°C)	

ORDERING INFORMATION

PZCS -

A
4

B	
---	--

C	
---	--

D

E

F

A Electrical Configuration

4

 - 2 wire current loop device

B Connection Method

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">6</td><td style="width: 20px; height: 20px; text-align: center;">A</td></tr></table>	6	A	Integral Economy PVC Cable (80°C) Unarmoured
6	A		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">6</td><td style="width: 20px; height: 20px; text-align: center;">B</td></tr></table>	6	B	Integral Economy PVC Cable (80°C) Armoured
6	B		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">6</td><td style="width: 20px; height: 20px; text-align: center;">C</td></tr></table>	6	C	Integral Cable (140°C) Unarmoured
6	C		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">6</td><td style="width: 20px; height: 20px; text-align: center;">D</td></tr></table>	6	D	Integral Cable (140°C) Armoured
6	D		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">7</td><td style="width: 20px; height: 20px; text-align: center;">A</td></tr></table>	7	A	Integral Economy Arm'ed Cable/Waterproof Gland
7	A		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">7</td><td style="width: 20px; height: 20px; text-align: center;">B</td></tr></table>	7	B	Integral Economy Unarm'ed Cable/Waterproof Gland
7	B		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">8</td><td style="width: 20px; height: 20px; text-align: center;">E</td></tr></table>	8	E	Integral Connector, 3 pin, circular, threaded
8	E		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">8</td><td style="width: 20px; height: 20px; text-align: center;">F</td></tr></table>	8	F	Integral Connector, BNC
8	F		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">9</td><td style="width: 20px; height: 20px; text-align: center;">C</td></tr></table>	9	C	Integral Cable Unarm'ed/Braided Flexible Conduit
9	C		

C₁ Cable length (Specify in whole metres)

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td></tr></table>	0	2	e.g. = 2m Total length, from TxD to free end
0	2		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">0</td></tr></table>	0	0	for no cable, i.e. connector versions of instrument
0	0		

C₂ Conduit Length Over Cable

For connection method 9 only, excess cable in 0.5m increments

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">A</td></tr></table>	0	2	A	e.g. 2m conduit, 0.5m excess cable from free end (Std)
0	2	A		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">B</td></tr></table>	0	2	B	e.g. 2m conduit, 0.3m excess cable from free end
0	2	B		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">C</td></tr></table>	0	2	C	e.g. 2m conduit, 1.0m excess cable from free end
0	2	C		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">D</td></tr></table>	0	2	D	e.g. 2m conduit, 1.5m excess cable from free end
0	2	D		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td><td style="width: 20px; height: 20px; text-align: center;">2</td><td style="width: 20px; height: 20px; text-align: center;">E</td></tr></table>	0	2	E	e.g. 2m conduit, 2.0m excess cable from free end
0	2	E		

D Cable/Conduit End Fitting

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td></tr></table>	0	- No cable/conduit end fitting.
0		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">1</td></tr></table>	1	¼" BSP female
1		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">2</td></tr></table>	2	M16 male
2		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">3</td></tr></table>	3	M20 male
3		

E Output & Frequency band (3dB point)

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">1</td></tr></table>	1	50µA/g ± 5%
1		

F Hazardous Area Approval

<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">0</td></tr></table>	0	- Non Intrinsic
0		
<table border="1" style="display: inline-table; vertical-align: middle;"><tr><td style="width: 20px; height: 20px; text-align: center;">1</td></tr></table>	1	- Intrinsically Safe (contact Sensonics)
1		

DS1110



Sensonics Ltd
 Northbridge Road
 Berkhamsted
 Herts, HP4 1EF
 United Kingdom
 Tel: +44 (0)1442 876833
 Fax: +44 (0)1442 876477
www.sensonics.co.uk