


SENTURION EDDY CURRENT PROBES



STRAIGHT MOUNT TYPE - PRS 02 - Ø5mm TIP

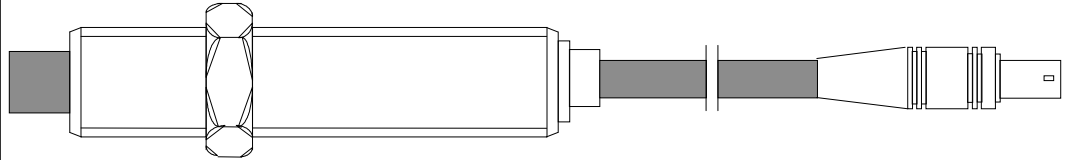

- 2.5mm measuring range
- Non contact measurement of static or dynamic surfaces
- Robust stainless steel threaded case, in various sizes
- Peek encapsulated tip, impervious to oil or water ingress
- Suitable for forward or reverse mounting in suitable bracketry
- Supplied with free running locknut
- Choice of cable lengths with or without armouring
- Connection directly to driver or via an extension cable
- Operating temperature range -30°C to +180°C

Sensonics range of **SENTURION** eddy current probes are designed to be the most robust and reliable units available, and are ideally suited to a vast range of industrial applications.

The **SENTURION** eddy current probes are intended for use within a system comprising of the probe, an extension cable (if required) and a driver unit. The probes are supplied in tuned lengths, and can be linked directly to the driver or via the afore mentioned extension cable. However the system is connected the total lengths must add up to 2, 5, 7, 9 or 14 metres.

A free running locknut is supplied with the straight mount probes, which is used to lock the unit in position when mounted in a bracket.

Sensonics can supply a range of ancillary items such as brackets, housing for probes and drivers, glands, as well as offer advice on probe applications and mounting.


SENTURION EDDY CURRENT PROBES

STRAIGHT MOUNT TYPE - PRS 02

SPECIFICATION

Body material.....	Stainless steel
Tip material.....	PEEK with stycast potting
Cable specification.....	RG179 PTFE insulated
Linear range - $\pm 1\%$ of reading.....	0.25 to 2.25mm
- $\pm 1\%$ of full scale.....	0.125 to 2.5mm
Sensitivity.....	8mV/ μ m
Temperature sensitivity - Probe.....	Less than 5% at 150°C
- Driver.....	Less than 5% at 90°C
Output impedance.....	Less than 50 Ω
Interchangeability.....	Less than 5%
Cal pot range.....	$\pm 5\%$ or greater
Operating temperature - Probe.....	-30°C to +180°C
- Driver.....	-30°C to +90°C
Survival temperature.....	As operating temperature
Power supply.....	-24Vdc at 30mA nominal
Power supply tolerance.....	-18Vdc to -30Vdc (linear range will be affected)
Frequency range.....	DC to 10kHz
Resolution (restricted by noise, drift & stability).....	0.002mm
Effect of target curvature.....	+2% for $\varnothing 150$ mm
.....	+5% for $\varnothing 25$ mm
Effect of target magnetism.....	Less than 1% at 110mT

ORDERING INFORMATION

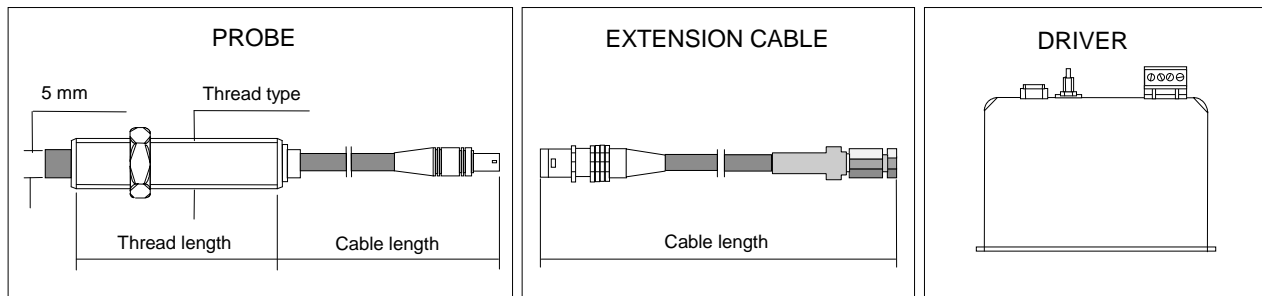

PRS02/ 1.0 U 1 0

Cable length

0.5 – 0.5m
1.0 – 1m
2.0 – 2m
5.0 – 5m
7.0 – 7m
9.0 – 9m
14 – 14m

Cable protection

U – Unarmoured (standard)
A – Armoured

Connector gender

0 – Female SMC (for direct driver connection)
1 – Male LEMO (f.u.w. extension cable)
2 – Male SMC coaxial jack (f.u.w. extension)

Thread type

0 – 1/4"UNF (standard)
1 – M6x0.75
2 – M8x1.25
3 – 3/8"UNF

Thread length is 50mm on standard units, but can be between 20mm and 150mm Please specify separately.

Note: Total system lengths must add up to

2, 5, 7 or 9m (2m systems cannot include extension cables).

Probe system length may be up to 0.7m longer than stated.

EXC/ 4.0 A 0

Cable length

4.0 – 4m
4.5 – 4.5m
6.0 – 6m
6.5 – 6.5m
8.0 – 8m
8.5 – 8.5m

Cable protection

A – Armoured
U – Unarmoured

Connector type

0 – SMC plug
1 – Lemo 00

EC02/ 5 0

Total system cable length

2 – 2m
5 – 5m
7 – 7m
9 – 9m
14 – 14m

Range (Sensitivity)

0 – 2.5mm (8mV/ μ m) (API 670)