


SENTURION EDDY CURRENT PROBES



STRAIGHT MOUNT TYPE - PRS 04 - Ø8mm TIP

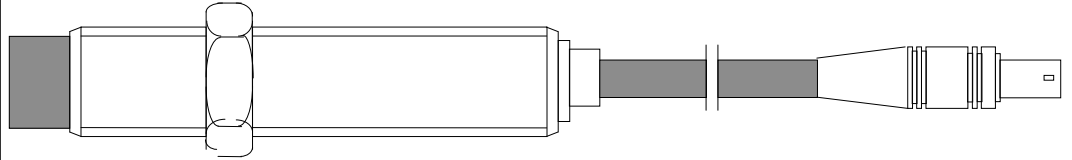

- Measuring range 2.5 or 4mm
- Non contact measurement of static or dynamic surfaces
- Robust stainless steel threaded case, in various sizes
- Peek encapsulated tip, impervious to oil or water ingress
- Suitable for forward or reverse mounting in suitable bracketry
- Supplied with free running locknut
- Choice of cable lengths with or without armouring
- Connection directly to driver or via an extension cable
- Operating temperature range -30°C to +180°C
- Intrinsically safe options available see DS1151

Sensonics range of **SENTURION** eddy current probes are designed to be the most robust and reliable units available, and are ideally suited to a vast range of industrial applications.

The **SENTURION** eddy current probes are intended for use within a system comprising of the probe, an extension cable (if required) and a driver unit. The probes are supplied in tuned lengths, and can be linked directly to the driver or via the afore mentioned extension cable. However the system is connected the total lengths must add up to 2, 5, 7, 9 or 14 metres.

A free running locknut is supplied with the straight mount probes, which is used to lock the unit in position when mounted in a bracket.

Sensonics can supply a range of ancillary items such as brackets, housing for probes and drivers, glands, as well as offer advice on probe applications and mounting.


SENTURION EDDY CURRENT PROBES

STRAIGHT MOUNT TYPE – PRS04

SPECIFICATION

Body material	Stainless steel
Tip material	PEEK with stycast potting
Cable specification	RG179 PTFE insulated
Linear range - $\pm 1\%$ of reading	0.25 to 2.25mm (For 2.5mm range)
- $\pm 1\%$ of full scale	0.125 to 2.5mm (For 2.5mm range)
Sensitivity	8mV/ μm or (4mV/ μm)
Temperature sensitivity - Probe	Less than 5% at 150°C
- Driver	Less than 5% at 90°C
Output impedance	Less than 50 Ω
Interchangeability	Less than 5%
Cal pot range	$\pm 5\%$ or greater
Operating temperature - Probe	-30°C to +18 0°C
- Driver	-30°C to +90°C
Survival temperature	As operating temperature
Power supply	-24Vdc at 30mA nominal
Power supply tolerance	-18Vdc to -30Vdc (linear range will be affected)
Frequency range	DC to 10khz
Resolution (restricted by noise, drift & stability)	0.002mm
Effect of target curvature	+2% for $\phi 150\text{mm}$
.....	+5% for $\phi 25\text{mm}$
Effect of target magnetism	Less than 1% at 110mT

ORDERING INFORMATION

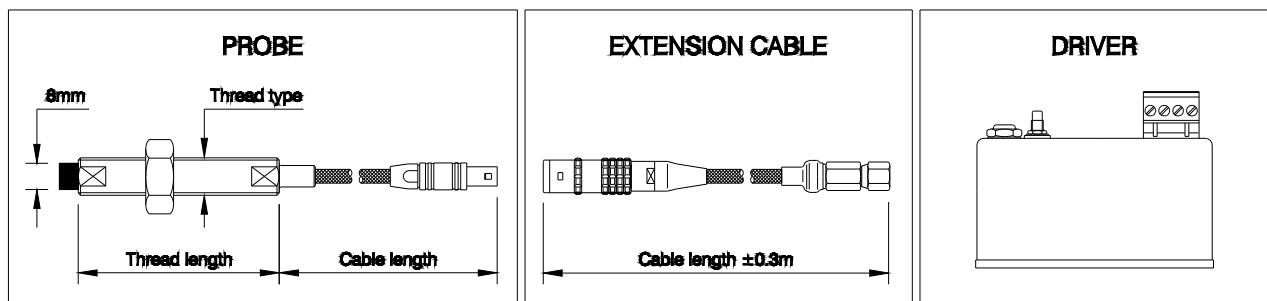

PRS04/ **1.0** **U** **1** **0** **0**

Cable length
 0.5 – 0.5m
 1.0 – 1m
 2.0 – 2m
 5.0 – 5m
 7.0 – 7m
 9.0 – 9m
 14 – 14m (not 4mm range)

Cable protection
 U – Unarmoured (standard)
 A – Armoured

Connector gender
 0 – Female SMC (for direct driver connection)
 1 – Male LEMO (f.u.w. extension cable)
 2 – Male SMC coaxial jack (f.u.w. extension)

Thread type
 0 – 3/8"UNF (standard)
 1 – M10x1.0

Thread length is 50mm on standard units, but can be between 25mm and 115mm. Please specify separately.

Range (sensitivity)
 0 – 2.5mm (8mV/ μm) (API1670)
 1 – 4mm (4mV/ μm)

EXC/ **4.0** **A** **0**

Cable length
 4.0 – 4m
 4.5 – 4.5m
 6.0 – 6m
 6.5 – 6.5m
 8.0 – 8m
 8.5 – 8.5m

Cable protection
 A – Armoured
 U – Unarmoured

Connector type
 0 – SMC
 1 – LEMO 00

ECD04/ **5** **0**

Total system cable length
 2 – 2m
 5 – 5m
 7 – 7m
 9 – 9m
 14 – 14m (not 4mm range)

Range (Sensitivity)
 0 – 2.5mm (8mV/ μm) (API1670)
 1 – 4mm (4mV/ μm)

Note: Total system lengths must add up to 2, 5, 7 or 9m (2m systems cannot include extension cables). Probe system length may be up to 0.7m longer than stated.

L157



Sensonics Ltd
 Northbridge Road
 Berkhamsted
 Herts, HP4 1EF
 United Kingdom
 Tel: +44 (0)1442 876833
 Fax: +44 (0)1442 876477
www.sensonics.co.uk